


PA72 Series - PXI/PXIe Generator & Digitizer platform



Features

- Flexible analog signal generation and capture platform
- Two daughter board slots
- Choose daughter boards from the 7 available types
- On-board high accuracy voltmeter
- On-board high performance clock source
- 1ppm clock stability / 0.5ps clock jitter
- Available for PXI and PXI Express
- LabView and LabWindows/CVI (VXIplug&play compatible) drivers included

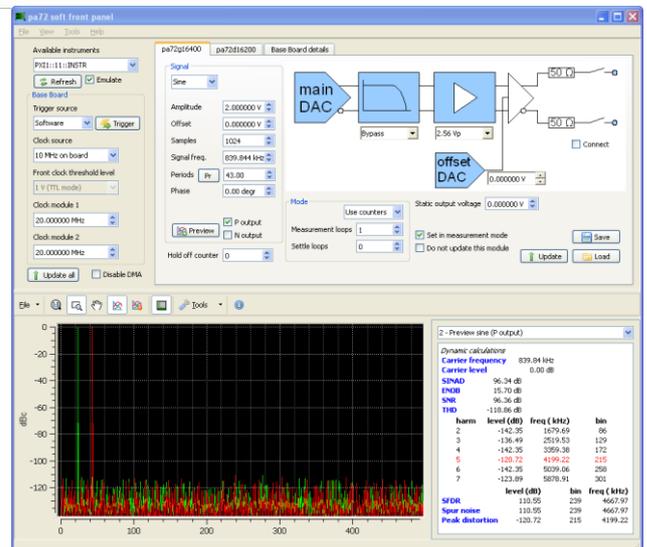

User control panel for the PA72 and an AWG daughter board

General description

The PA72 platform is a platform of flexibility. It consists of a base board and one or two daughter boards. In daughter boards there is choice from several different generators, digitizers, filters, and Flexible Digital I/O modules. Also custom daughter boards can easily be created. This allows you to configure a data acquisition card exactly tailored to your needs.

The PA72 concept provides a flexible and cost effective solution for medium and high end analog functions.

Each daughter board is optimized for best signal performance. A PA72 daughter board typically has Differential In-/Outputs, Low THD, Low Noise and High Accuracy.

The base board contains a 2-channel high-stability and low-jitter PLL clock generator, trigger circuitry, and of course the PXI-bus interface. A digital voltmeter is available for self-calibration purposes (supported by the driver), and can also be used for custom development boards.

The base board is available with PXI bus interface (PA72) and PXI-Express bus interface (PA72e). Both baseboards accept the same daughter boards. The J2 connector is a small version (XJ4) to ensure both versions are hybrid-slot compatible.

PA72 Series - PXI/PXIe Generator & Digitizer platform

PA72 Base board

Description


The PA72 base board contains a clock generator, trigger circuitry, a digital voltmeter and the PXI bus interface. In the block diagram below, the base board functions are yellow and the daughter board functions are green.

The clock generator is a low jitter PLL clock that has less than 0.5ps jitter for low loop filter bandwidths. With higher loop filter bandwidths, frequency settling time can be less than 250ms. The main clock frequency ranges from 2kHz up to 945MHz with a resolution of less than 1 kHz. Each daughter board slot has its own clock divider.

Therefore the clock for each daughter board can be different while maintaining proper synchronization. The PLL clock generator features a high stability, low noise and low jitter 10MHz on-board reference clock with 1ppm frequency stability. In addition the PLL can be locked to the PXI backplane clock or to an external reference clock. The on-board clock source can also be bypassed by an external direct clock.

The trigger input supports edge and level triggering and positive and negative going trigger signals. The trigger source can be software, PXI Star trigger, PXI Trigger 0-6, or external (front). Additionally, digitizer boards can be set to edge-trigger on the analog input signal.

Block Diagram

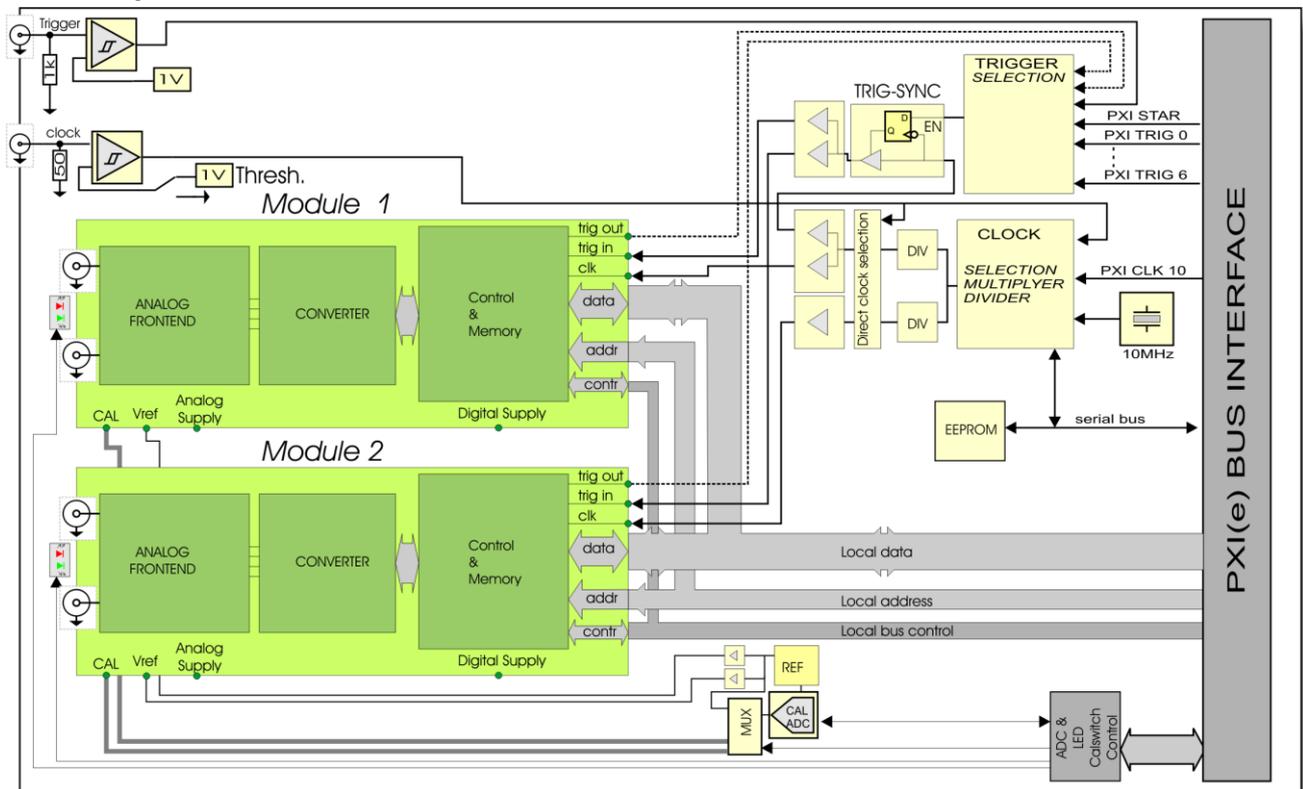

Specifications

PLL clock

Frequency range	2kHz to 945MHz
Sync possibilities	10MHz backplane or 10MHz external clock
PLL lock time	250ms - 1s (depending on loop filter BW)
Jitter	0.5ps typical

External clock input

Clock rate	DC to 500MHz
Threshold level	0V or 1V (programmable)
Input impedance	50 Ohm

Front trigger input

Threshold level	1V
Input impedance	1k Ohm
Max input level	-0.5V to +5.5V
Coupling	DC

Trigger sources

Digitizer's analog level trigger, Front trigger input, PXI STAR, PXI TRIG 0..6 (3..6 inverted), Software trigger

Bus interface

PA72 bus	32-bit PXI, burst mode support
PA72e bus	x1 PXI Express, burst mode support
Max. burst data rate	132 MByte/s

PA72 Series - PXI/PXIe Generator & Digitizer platform

PA72G16400 daughter board - 16-bit / 400Mps Arbitrary Waveform Generator



Description

The PA72G16400 is a 16-bit arbitrary waveform generator, capable of generating waveforms at speeds up to 400Mps. The high resolution and the high sample rate allows generating signals with very low quantization noise levels. An onboard offset voltage source allows generating offset signals while maintaining optimal utilization of the DAC's digital range. With the 8MWord of memory, there is lots of room for uploading several different patterns, allowing switching patterns with minimal bus communication.

Specifications

Channels	1
Resolution	16-bit
Update rate with PA72 clock	2kHz to 400MHz
Update rate external clock	DC to 400MHz
Pattern depth	8M-words
Output ranges Single-Ended	0.32V _p to 2.56V _p in 6 ranges
Output ranges Differential	0.64V _p to 5.12V _p in 6 ranges
DC-offset voltage	-2.56 to +2.56V (>14-bit resolution)
Output configuration	50-Ohm, Single-Ended or Differential
Bandwidth	DC to 80-140MHz
Output filters	Bypass, 60MHz, 30MHz
Absolute accuracy (Vout+)	±(250μV + 0.1% of range + 0.1% of value)
Relative accuracy	±0.006%
SNR (200Mps, 5V _{pp} diff.)	69dB @ F _{OUT} = 1MHz (BW 0-80MHz)
SNR (200Mps, 5V _{pp} diff.)	67dB @ F _{OUT} = 10MHz (BW 0-80MHz)
THD (200Mps, 5V _{pp} diff.)	84dB @ F _{OUT} = 1MHz
THD (200Mps, 5V _{pp} diff.)	73dB @ F _{OUT} = 10MHz
SFDR (200Mps, 5V _{pp} diff.)	82dB @ F _{OUT} = 1MHz

PA72G14180 daughter board - 14-bit / 180Mps Arbitrary Waveform Generator



Description

The PA72G14180 is a 14-bit arbitrary waveform generator, capable of generating waveforms at speeds up to 180Mps. An onboard offset voltage source allows generating offset signals while maintaining optimal utilization of the DAC's digital range. With the 64MWord of memory, there is lots of room for uploading long complex waveforms. Also uploading of many different patterns is possible, allowing switching patterns with minimal bus communication.

Specifications

Channels	1
Resolution	14-bit
Update rate with PA72 clock	2kHz to 180MHz
Update rate with ext. clock	DC to 180MHz
Pattern depth	64M-words
Output ranges	0.2V _p to 3.28V _p proportional ranging
DC-offset voltage	-2.56V to +2.56V
Output configuration	50-Ohm, Single-Ended or Differential
Bandwidth	DC to 90MHz
Output filters	Bypass, 30MHz, 15MHz
Absolute accuracy	±(250μV + 0.1% of range + 0.1% of value)
Relative accuracy (INL)	±0.025% of range
SNR (180Mps, 3.2V _{pp} diff.)	68dB @ F _{OUT} = 1MHz (BW 0-70MHz)
SNR (180Mps, 3.2V _{pp} diff.)	64dB @ F _{OUT} = 10MHz (BW 0-70MHz)
THD (180Mps, 2.0V _{pp} diff.)	81dB @ F _{OUT} = 1MHz
THD (180Mps, 2.0V _{pp} diff.)	70dB @ F _{OUT} = 10MHz
SFDR (180Mps, 2.0V _{pp} diff.)	82dB @ F _{OUT} = 1MHz

PA72D16180A daughter board - 16-bit / 180Mps Digitizer



Description


The PA72D16180A is a 16-bit digitizer, capable of capturing waveforms at speeds up to 180Mps. An onboard offset voltage source allows capturing offset signals while still using the optimal range for maximum ADC utilization. Two onboard filters allow suppression of out-of-band noise. The 64MWord onboard memory enables capturing very long waveforms, or sequentially capturing multiple signals with minimal intermediate bus communication.

Specifications

Channels	1
Resolution	16-bit
Sample rate	1MHz to 180MHz
Memory depth	64M-words
Input configurations	50Ω or 1MΩ, AC or DC, Diff. or Single-Ended
Input ranges	50Ω: 0.256V _p to 3.072V _p in 8 ranges 1MΩ: 0.256V _p to 15.36V _p in 12 ranges
DC-offset voltage	16-bit resolution
Input bandwidth	DC to 95-170MHz (typical, depending on range)
Input filters	Bypass, 60MHz, 30MHz
Absolute accuracy (Vin+)	±(250μV + 0.1% of range + 0.2% of value)
Relative accuracy	±0.006%
SNR (180Mps, 50Ω, 4V _{pp} diff)	69dB @ F _{IN} = 1MHz (BW 0-80MHz)
SNR (180Mps, 50Ω, 4V _{pp} diff)	67dB @ F _{IN} = 10MHz (BW 0-80MHz)
THD (180Mps, 50Ω, 4V _{pp} diff)	85dB @ F _{IN} = 1MHz
THD (180Mps, 50Ω, 4V _{pp} diff)	81dB @ F _{IN} = 10MHz
SFDR(180Mps, 50Ω, 4V _{pp} diff)	83dB @ F _{IN} = 1MHz

PA72 Series - PXI/PXIe Generator & Digitizer platform

PA72D14130 daughter board - 14-bit / 130MSPs Digitizer

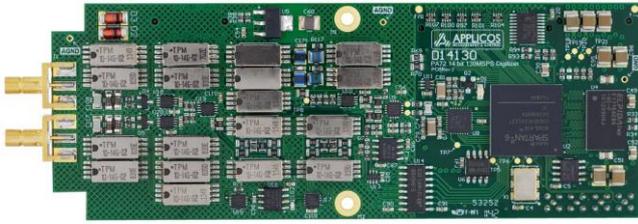


Description

The PA72D14130 is a 14-bit digitizer, capable of capturing waveforms at speeds up to 130MSPs. An onboard offset voltage source allows capturing offset signals while still using the optimal range for maximum ADC utilization. Two onboard filters allow suppression of out-of-band noise. The 64MWord onboard memory enables capturing very long waveforms, or sequentially capturing multiple signals with minimal intermediate bus communication.

Specifications

Channels	1
Resolution	14-bit
Sample rate	1MHz - 130MHz
Memory depth	64M-word
Input ranges (span)	0.338V _p to 3.6V _p in 8 ranges
Input operating area	-3.6V to +3.6V
Input configuration	Differential or Single-Ended
Input impedance	10kOhm or 50-Ohm, DC or AC
DC-offset voltage	-3.6V to +3.6V
Input bandwidth	65MHz (typical)
Input filters	Bypass, 30MHz, 15MHz
Absolute accuracy	±(250µV+0.05% of range +0.1% of value)
Relative accuracy (INL)	±0.025% of range
SNR (130MSPs, 3.2V _{pp} diff.)	66dB @ F _{IN} = 1MHz (BW 0-60MHz)
SNR (130MSPs, 3.2V _{pp} diff.)	64dB @ F _{IN} = 10MHz (BW 0-60MHz)
THD (130MSPs, 3.2V _{pp} diff.)	78dB @ F _{IN} = 1MHz
THD (130MSPs, 3.2V _{pp} diff.)	74dB @ F _{IN} = 10MHz
SFDR (130MSPs, 3.2V _{pp} diff.)	80dB @ F _{IN} = 1MHz

PA72DIOS6016 daughter board – Multifunctional programmable Digital I/O

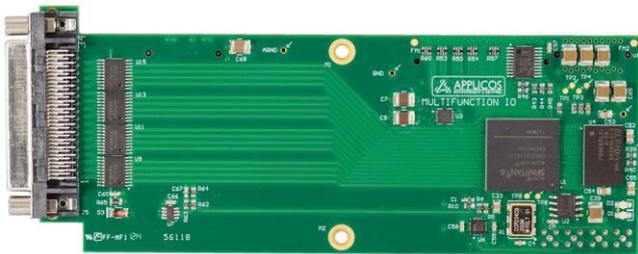


Description

The PA72DIOS6016 is a multifunctional digital design core. The FPGA allows for implementing many different custom applications. The connector has 64 Input/Output pins which can be assigned as TTL I/O or as differential inputs. 128 MByte of DDR2 memory is available to the FPGA, and an onboard EEPROM allows for storing values in non-volatile memory. The I/O bank voltage can be FPGA-selected between 2.5 and 3.3 Volt.

Specification

FPGA	Xilinx Spartan6 XC6SLX16
Logic cells	14579
CLB Flip-Flops	18224
Front connector	VHDCI SCSI-5
Max. TTL/LVCMOS I/Os	32
Max. differential inputs	32
Max. differential outputs	10
I/O voltages	2.5V and 3.3V
I/O configurations	LVTTTL, LVCMOS, PCI, SSTL, (B)LVDS*, LVPECL*, and more.
DDR Memory size	1Gbit
DDR Memory frequency	800MHz
Total block RAM	576kBit
Block RAM max. frequency	320MHz
* Differential signals as input only	

PA72DIOS6100 daughter board – Multifunctional programmable Digital I/O

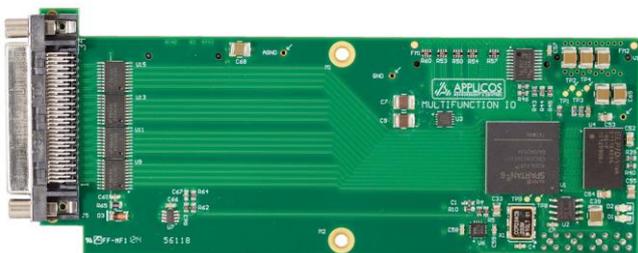

Description

The PA72DIOS6100 is the larger equivalent of the PA72DIOS6016. It features a larger FPGA, and also allows differential output signals. The FPGA allows for implementing many different custom applications. The connector has 64 Input/Output pins which can be assigned as TTL or as differential pairs. 128 MByte of DDR2 memory is available to the FPGA, and an onboard EEPROM allows for storing values in non-volatile memory. The I/O bank voltage can be FPGA-selected between 1.2, 1.8, 2.5 and 3.3 Volt, allowing a wide range of electrical standards.

Specification

FPGA	Xilinx Spartan6 XC6SLX100
Logic cells	101261
CLB Flip-Flops	126576
Front connector	VHDCI SCSI-5
Max. TTL/LVCMOS I/Os	32
Max. differential I/Os	32
I/O voltages	1.2V, 1.8V, 2.5V and 3.3V
I/O configurations	LVTTTL, LVCMOS, PCI, SSTL, (B)LVDS, LVPECL, and more.
DDR Memory size	1Gbit
DDR Memory frequency	800MHz
Total block RAM	4824kBit
Block RAM max. frequency	320MHz

- This product information is preliminary -

PA72 Series - PXI/PXIe Generator & Digitizer platform

PA72BPF daughter board – Dual differential band pass filter




Description

The PA72BPF daughter board is an additional filter board. It typically contains two selectable differential 3rd order elliptic band pass filters. These filter modules are tailored by Applicos to the customers' requirements. The filters can be used to filter the output signal of the generator daughter boards to achieve an even better distortion and noise suppression.



Specification

Standard values 10 MHz, 20MHz, 35 MHz, 42.5 MHz
Specifications below are typical/indicative values only!
 Pass band 5 MHz
 Pass band attenuation 1 - 3 dB
 Rejection 30dB minimum

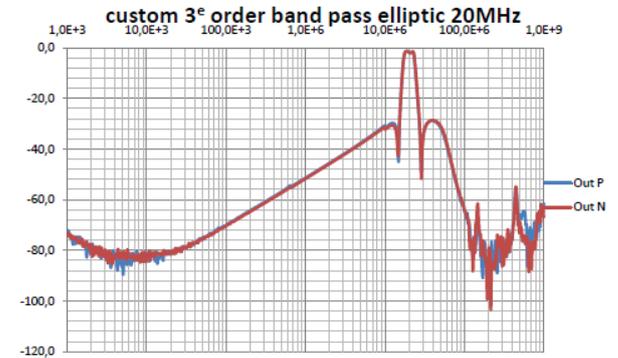

Software

The PA72 comes with a *VXIplug&play* compatible LabWindows/CVI driver, and a LabView driver. The driver API is fully documented, and gives you full control over the hardware. A LabView Application Example is included in the driver.

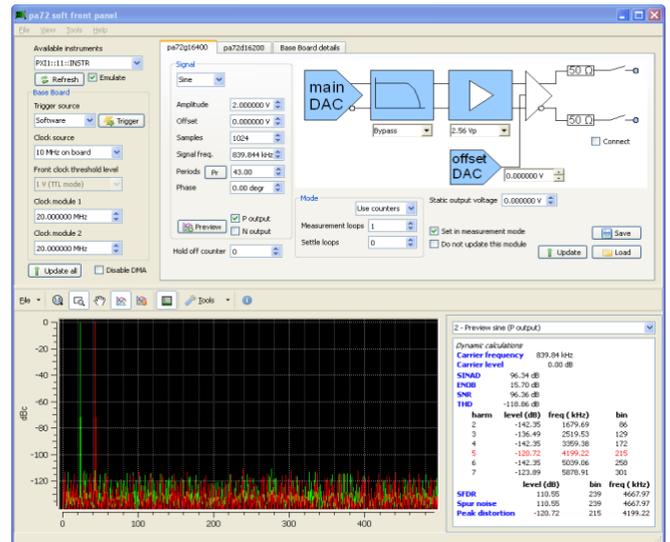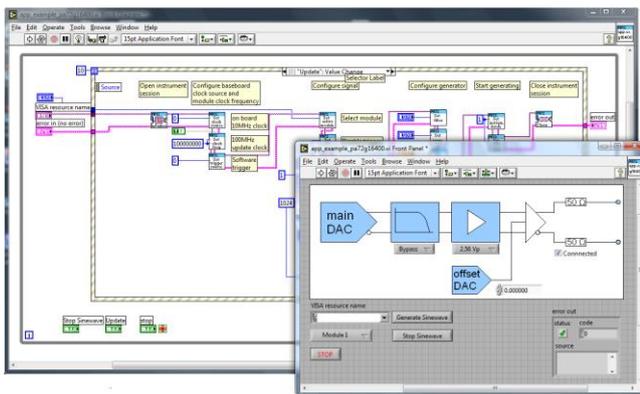

A Soft Front Panel tool is also included, which is a convenient way to quickly setup the hardware of your module and start a measurement.

Ordering information:

PA72-nm / PA72e-nm

n = daughter board 1 (top position)
m = daughter board 2 (bottom position)

Daughter board codes: 0 = empty
 1 = PA72G16400
 2 = PA72G14180
 5 = PA72D16180A
 6 = PA72D14130
 9 = PA72DIOS6016
 A = PA72DIOS6100
 F = PA72BPF Filter daughter board (specify filter requirements separately)



Examples:

PA72-15 → PA72 base board with PXI-1 bus interface and a PA72G16400 generator on position 1 and a PA72D16180A digitizer on position 2
 PA72e-20 → PA72e base board with PXI-Express bus interface and a PA72G14180 generator on position 1 and no board on position 2